



Smart sign



Light weight




Smart Control



Ip66

Features of Smart sign

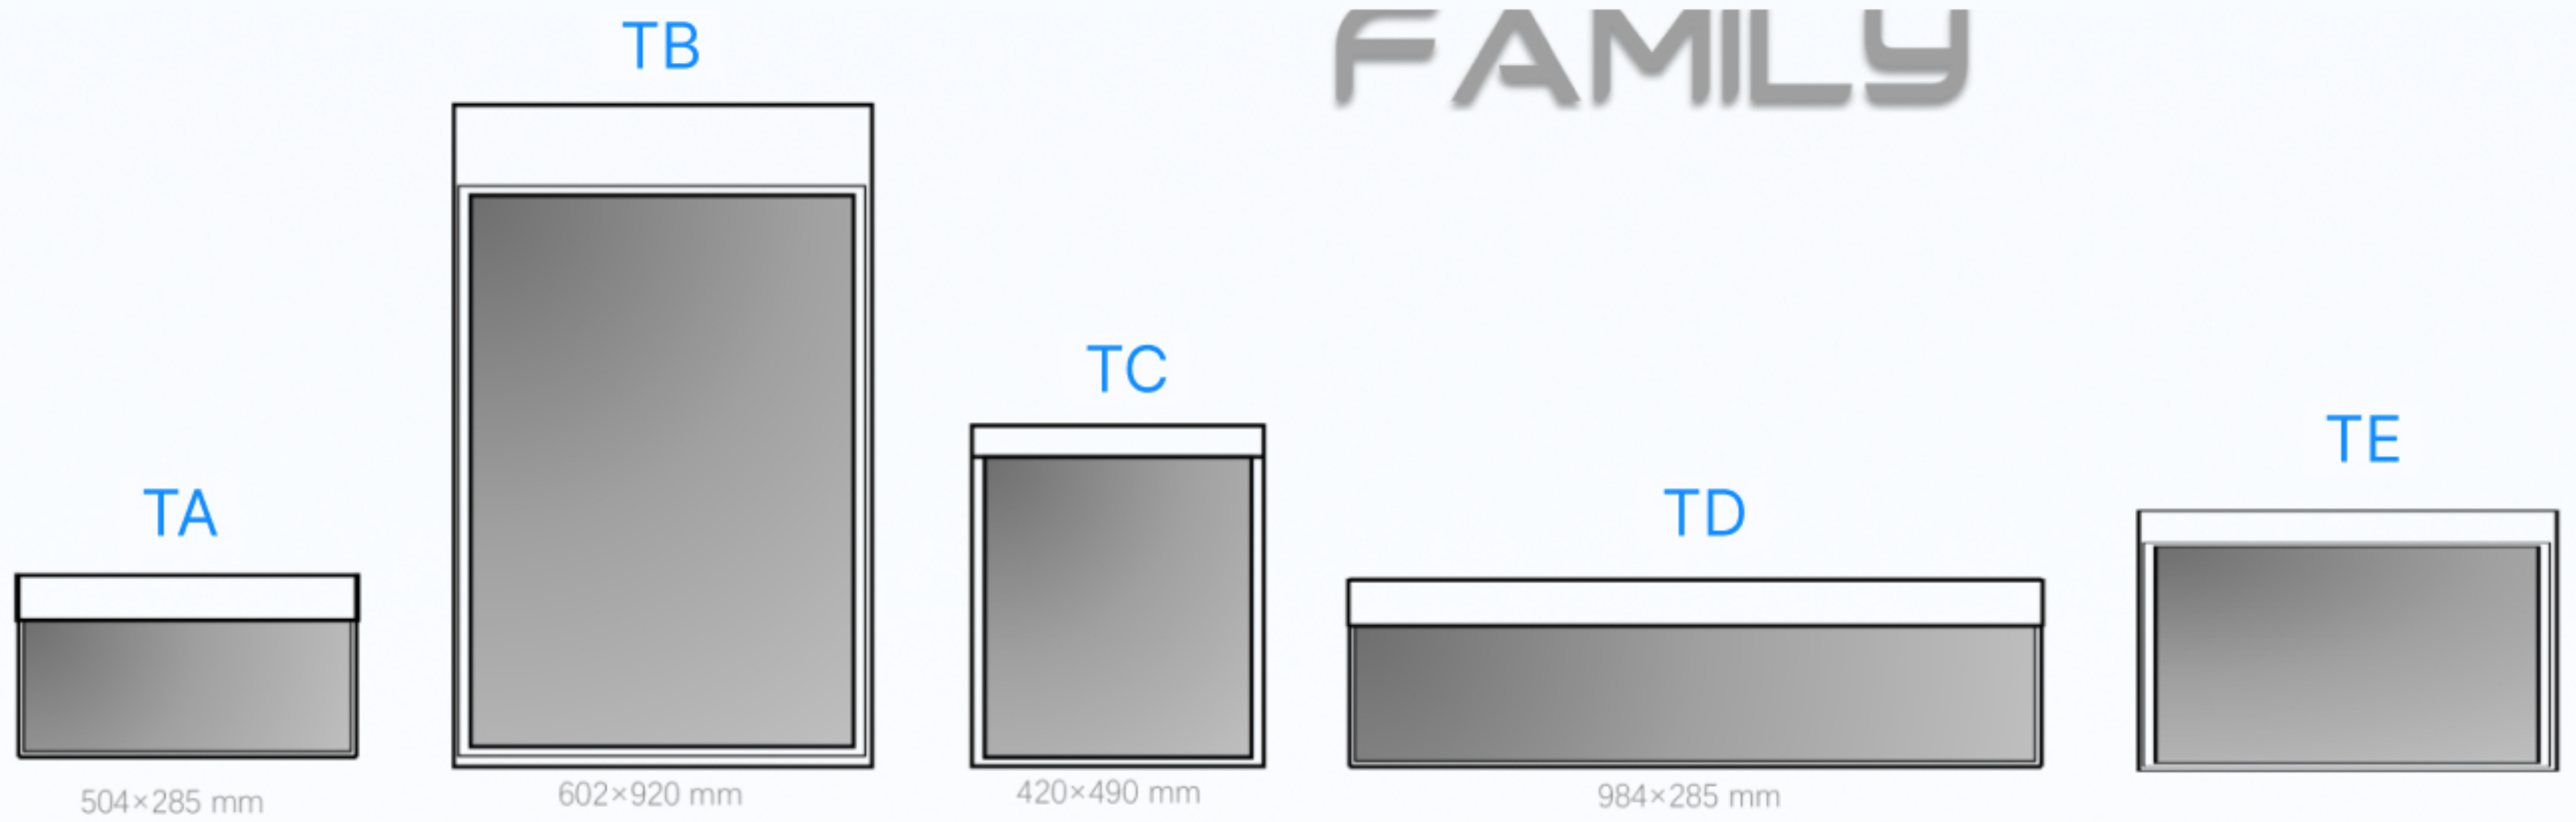

APPLICATION


STORE FRONT



Features of Smart sign


CONTROL MODE

Three control modes are provided for the device.

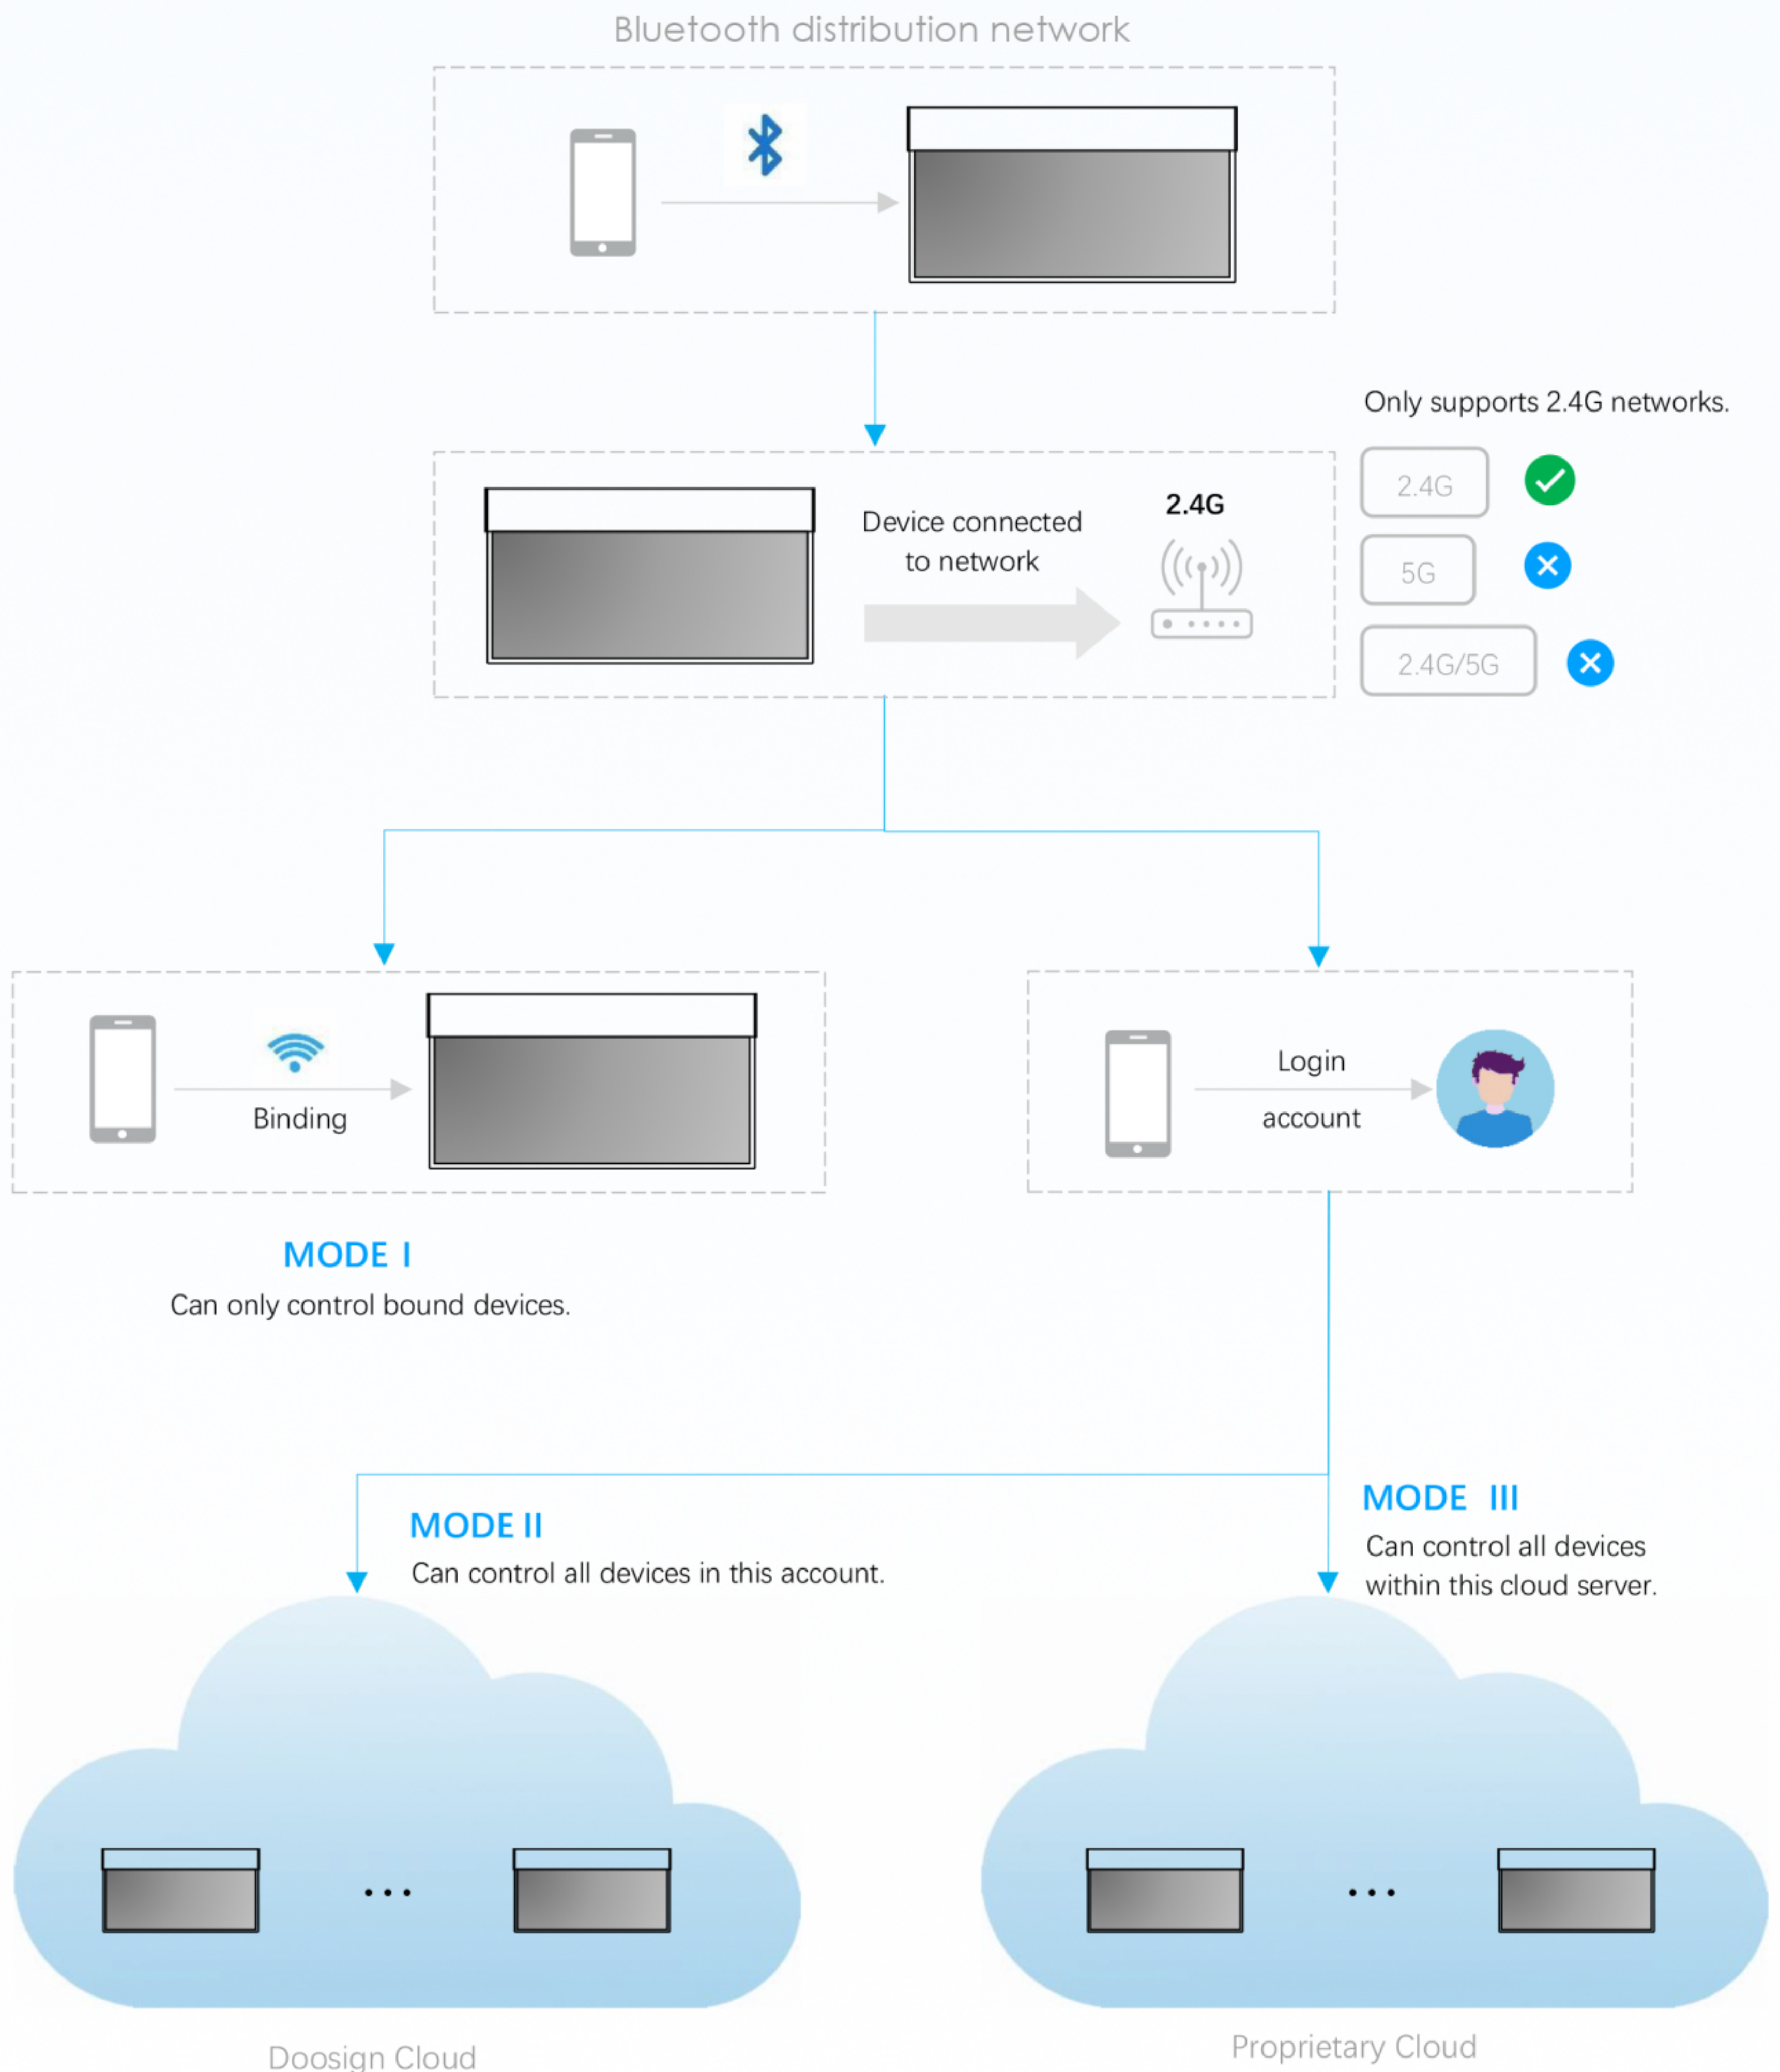

Features of Smart sign

TA

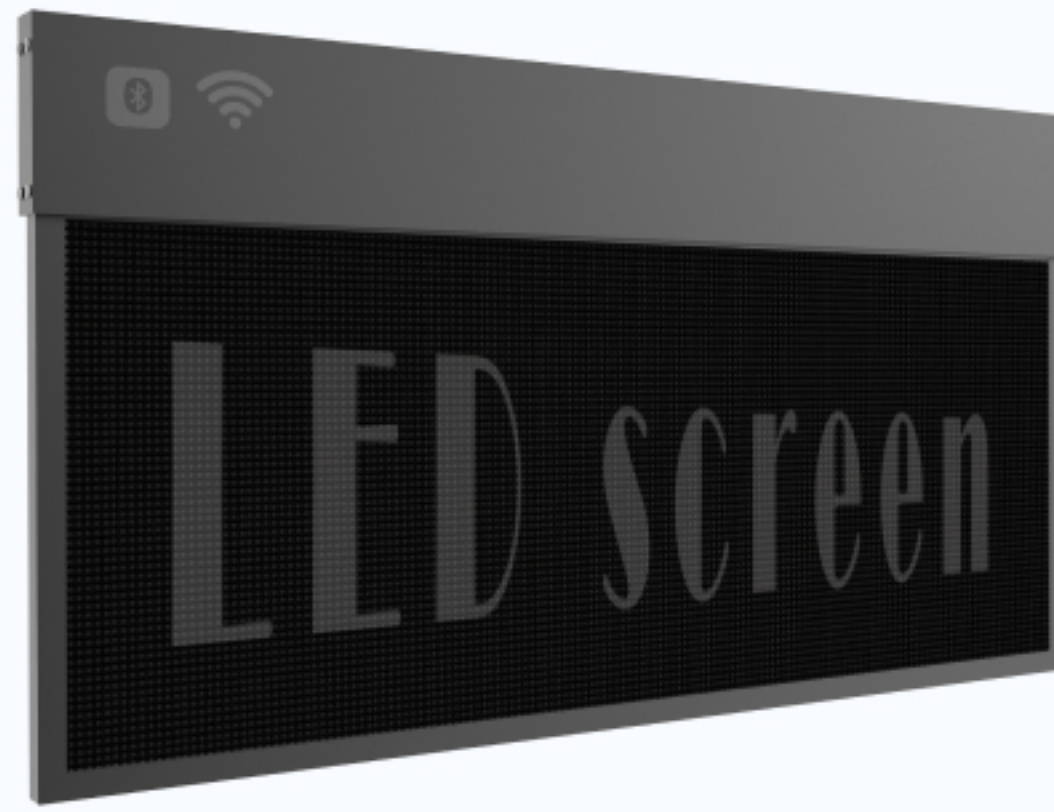

- Bright LED electronic display. The pixel pitch is 3mm, The resolution is 160×64 dots.
- Adopting an innovative BIG packaging process in combination with an aluminum profile frame.
- Overall dimensions : 504mm×285mm.
- Thin design. From 18mm at its thickest, to 5mm for the display screen.
- Ultra-thin and efficient switching power supply built within the device.
- Bluetooth and Wi-Fi wireless communication module.
- 256MB of RAM.
- Dedicated mobile app.

PARAMETERS

Model	Display configuration	Pixel pitch	Display Matrix Single face	Dimensions mm	Brightness nits	IP rating	Weight kg	Watts w
TA -S-SF3	Single Face	3mm	160×64	504×285	2500-3000	IP 53	1.6 kg	Max. 40 Avg. 13
TA -S-DF3	Double Face	3mm	160×64	504×285	2500-3000	IP 53	2.4 kg	Max. 80 Avg. 26

Features of Smart sign





- Bright LED electronic display. The pixel pitch is 5mm, The resolution is 112×160 dots.
- Adopting an innovative BIG packaging process in combination with an aluminum profile frame.
- Overall dimensions : 602mm×920mm.
- Thin design. From 18mm at its thickest, to 5mm for the display screen
- Ultra-thin and efficient switching power supply built within the device
- Bluetooth and Wi-Fi wireless communication module
- 256MB of RAM
- Dedicated mobile app

PARAMETERS

Model	Display configuration	Pixel pitch	Display Matrix Single face	Dimensions mm	Brightness nits	IP rating	Weight kg	Watts w
TB -O-5	Single Face	5mm	112×160	602×920	2500-3000	IP 65	6	Max. 200 Avg. 70
TB -O-2.5	Single Face	2.5mm	224×320	602×920	2500-3000	IP 65	6	Max. 200 Avg. 70

Features of Smart sign

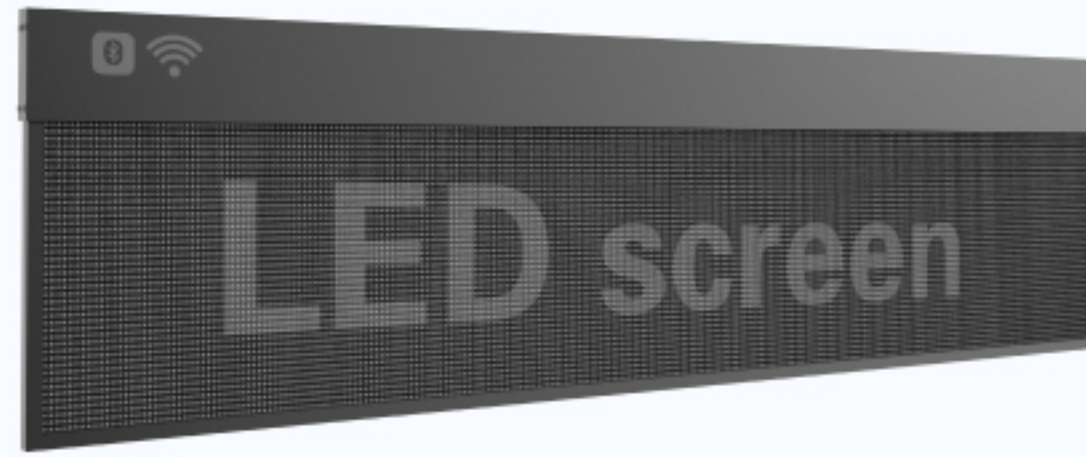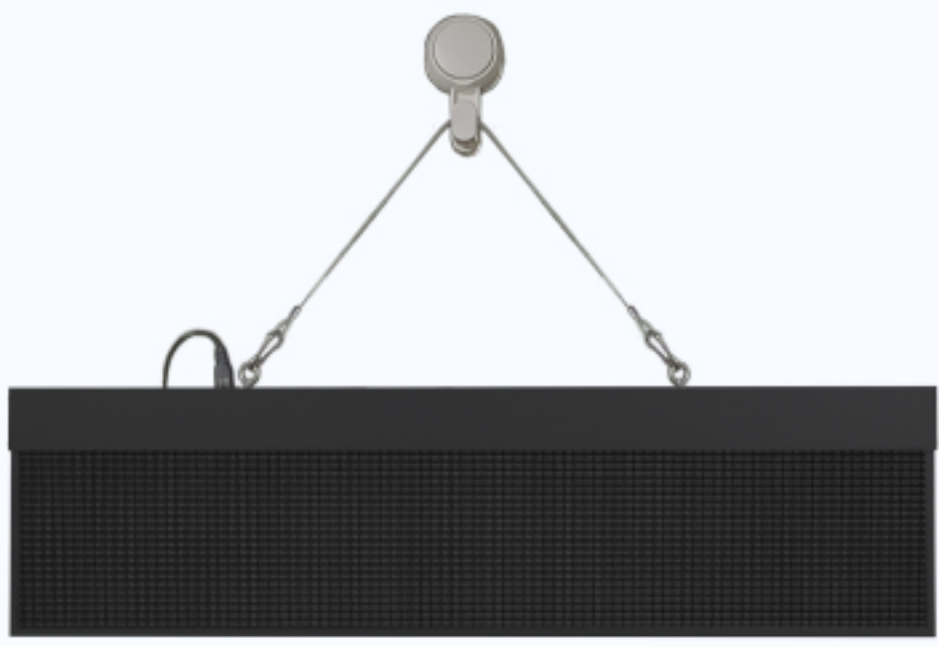


- Bright LED electronic display. The pixel pitch is 3mm, The resolution is 320×64 dots.
- Adopting an innovative BIG packaging process in combination with an aluminum profile frame.
- Overall dimensions : 984mm×285mm.
- Thin design. From 18mm at its thickest, to 5mm for the display screen.
- Ultra-thin and efficient switching power supply built within the device.
- Bluetooth and Wi-Fi wireless communication module.
- 256MB of RAM.
- Dedicated mobile app.

PARAMETERS

Model	Display configuration	Pixel pitch	Display Matrix Single face	Dimensions mm	Brightness nits	IP rating	Weight kg	Watts w
TD -S-SF3	Single Face	3mm	320×64	984×285	2500-3000	IP 53	3.0	Max. 80 Avg. 26
TD -S-DF3	Double Face	3mm	320×64	984×285	2500-3000	IP 53	4.6	Max. 160 Avg. 55

Features of Smart sign

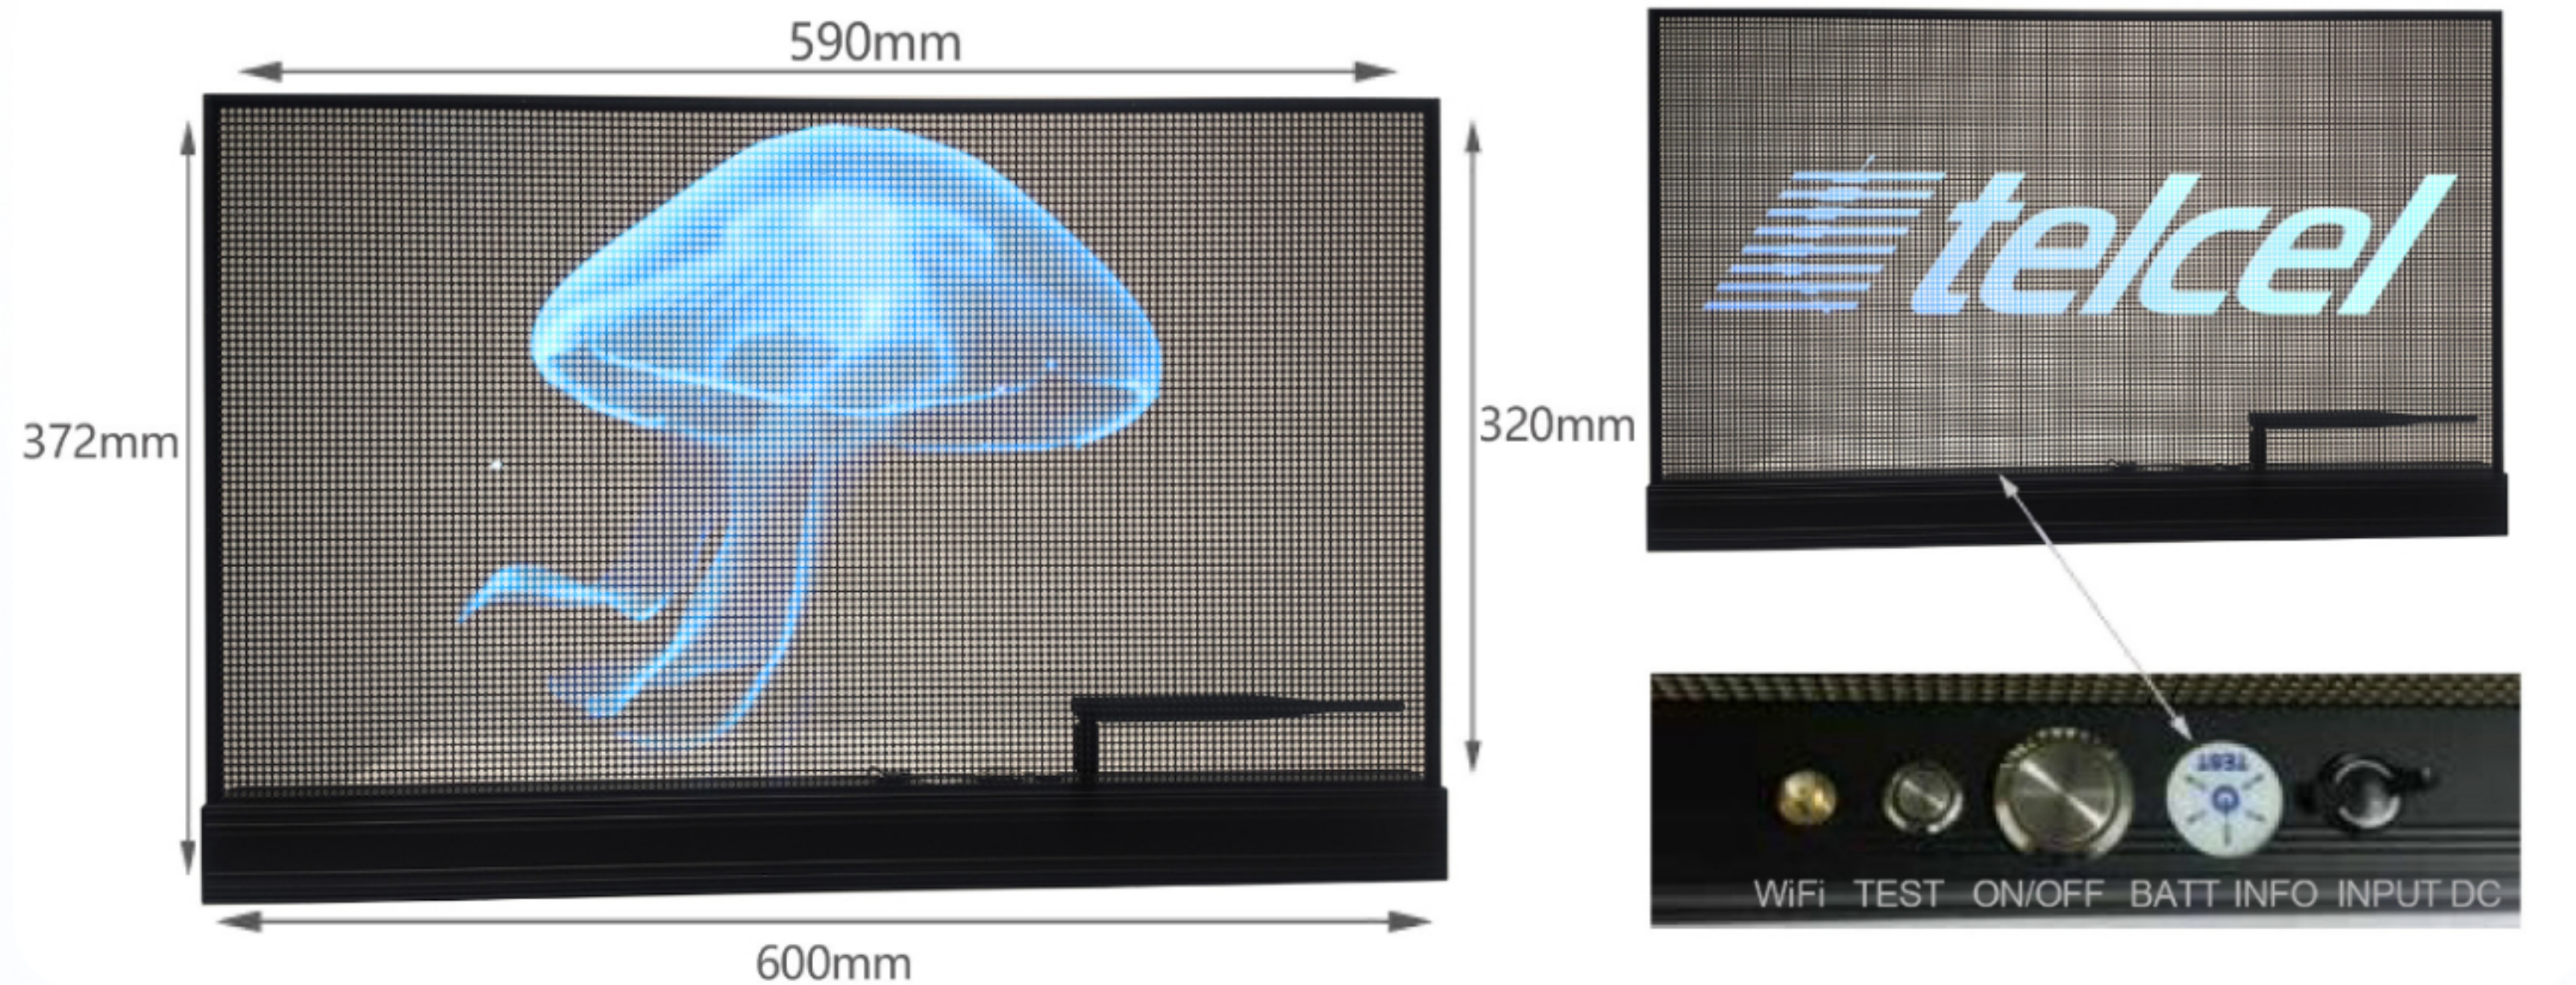

High permeability, light weight, low power consumption, high protection, air conditioning free heat dissipation. Meet high standards for commercial application



Highlight
2500-4500nit/m²



easy to plug
and unplug



Customizable size

PARAMETERS-P3.9

Pixel Pitch(mm)	3.9*3.9mm	IC	H-Refresh
LED Type	1212	Scan	static
Pixel Density(pixels/m)	152X84	Max.Power Consumption	100W/m
Module Size(WxH)(mm)	590X320	Ave.Power Consumption	30W/m
Tile Size(WxHxD)(mm)	600X372	Installation	Handheld Hang
Tile Material	Aluminum profile/glass fiber	Serviceability	Front/Back
Veight/Tile(箱)	1500g	IP Rating	IP34
ransparency	60%	Hor.viewing angle	160°
Brightness(cd/m)	2500-3000CD	Vert.viewing angle	160°
Brightness Level	256Level	Work Voltage	DC4.2V
Refresh Rate	7680Hz	Operational Temp	-10~40°C
Color Processing	16Bit	Operational Humidity	10%-90%
Colors	281 trillion	Battery capacity	20000mAh
Driving	Constant current	Product Life	3 hours